

Panasonic

Digital Proprietary Telephones

Quick Reference Guide

Model **KX-T7625 KX-T7630**
KX-T7633 KX-T7636

Important Information

When using the KX-T7600 series, keep the following conditions in mind.

- If there is any problem, unplug the extension line and connect a known working phone. If the known working phone operates properly, have the defective phone repaired by a specified Panasonic Factory Servicenter. If the known working phone does not operate properly, check the KX-TDA series Business Telephone Systems and the internal extension wiring.
- Keep the unit away from heating appliances and electrical noise generating devices such as fluorescent lamps, motors and televisions. These noise sources can interfere with the performance of the unit.
- This unit should be kept free of dust, moisture, high temperature (more than 40 °C [104 °F]) and vibration, and should not be exposed to direct sunlight.
- Do not use benzine, thinner, or the like, or any abrasive powder to clean the cabinet. Wipe it with a soft cloth.
- Do not use any handset other than a Panasonic handset.
- Do not disassemble this product. Dangerous electrical shock could result. The unit must only be disassembled and repaired by qualified service technicians.
- When a failure occurs, which exposes any internal parts, disconnect the telephone line cord immediately and return this unit to servicenter.
- Never attempt to insert wires, pins, etc., into the vents or other holes of this unit.

WARNING:

TO PREVENT THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE.

THIS HANDSET EARPIECE IS MAGNETIZED AND MAY RETAIN SMALL FERROUS OBJECTS.

IMPORTANT NOTICE:

Under power failure conditions, this telephone may not operate. Please ensure that a separate telephone, not dependent on local power, is available for use in an emergency.

Thank you for purchasing the Panasonic KX-T7600 series, Digital Proprietary Telephone. Please read this manual carefully before using this product and save this manual for future use.

This manual is designed to be used with your Digital Proprietary Telephone and a Panasonic KX-TDA series Business Telephone System.

Note: In this manual, the suffix of each model number is omitted.

Table of Contents

Features for the Digital Proprietary Telephones.....	Setting Features	9
Features List	Location of Controls	11
Using the Display Proprietary Telephone..	Connection.....	13
Using the Call Log or Directories	Setting	13
Accessing the System Features	Tilt Angle Adjustment	14
Entering Characters	Wall Mounting.....	14
Settings on the Programming Mode.....	Installing the KX-T7601/KX-T7603	15

Before Initial Use



When you ship the product

Carefully pack and send it prepaid, adequately insured and preferably in the original carton. Attach a postage-paid letter, detailing the symptom to the outside of the carton. DO NOT send the product to the Executive or Regional Sales offices. They are NOT equipped to make repairs.

Product service

Panasonic Factory Servicenters for this product are listed in the servicenter directory. Consult your authorized Panasonic dealer for detailed instructions.

Accessories (included) For extra orders, call toll-free: 1-800-332-5368.

☐ Handset  One	☐ Handset Cord  One	☐ Telephone Line Cord  One	☐ Wall Mounting Adaptor *  One
--	---	--	--

* This telephone comes with the wall mounting adaptor already attached. To remove the adaptor for desktop operation, push the adaptor toward the top of the unit while pressing the two tabs.

Features for the Digital Proprietary Telephones

Model	Description
KX-T7636*	DPT with Speakerphone, 6-Line Display with Backlight (24-CO)
KX-T7633*	DPT with Speakerphone, 3-Line Display with Backlight (24-CO)
KX-T7630	DPT with Speakerphone, 3-Line Display (24-CO)
KX-T7625	DPT with Speakerphone (24-CO)

* Optional USB Module and Add-on Key Module are available.

Features List

Outside (CO) Line button
 Off-hook
 On-hook
 Feature number
 Talk
 Group Directory Number
 Direct Station Selection button
 Confirmation Tone
 Dial Tone
 Ringback Tone

Feature	Operation
Making Calls	
Calling	To an extension → → To an outside party → → →
Redial	→ →
Quick Dialing	→ →
One-touch Dialing	To store OR → → → → STORE → OR To dial → — assigned as a One-touch Dialing button →
Operator Call	→ →
Personal Speed Dialing	To store → → → → → → → To dial AUTO DIAL → → → →
System Speed Dialing	To dial AUTO DIAL → → →
Doorphone Call	→ → → → →
Automatic Callback Busy	To set While hearing a busy tone To cancel → → → To answer from an idle extension While hearing a callback ring To answer from an idle outside line While hearing a callback ring → →
During a Conversation	
Call Hold	To hold To retrieve a call at the holding extension → / / → To retrieve an outside call from another extension → →
Call Transfer	[To an extension / → To an outside party] →

Features List

Feature	Operation	
Useful Features		
Off-hook Monitor	To set/cancel <i>During a conversation using the handset</i> SP-PHONE 	
Call Park	To set <i>During a conversation</i> TRANSFER C. Tone * 5 2 parking zone no. (2 digits) Specified * Auto C. Tone	
	To retrieve C. Tone * 5 2 stored parking zone no. (2 digits) C. Tone	
Multiple Party Conversation	To add other parties during a conversation CONF desired phone no. CONF C. Tone Talk to the new party. Talk with multiple parties.	
	To leave a conference CONF C. Tone	
Call Pickup	(DSS) * 4 1 extension no. Directed * 4 0 group no. (2 digits) Group C. Tone	
Sending a Call Waiting Tone	<i>While hearing a busy tone</i> 1 Wait for an answer.	
Paging	To page * 3 3 paging group no. (2 digits) C. Tone Announce. Wait for an answer. C. Tone	
	To answer * 4 3 C. Tone	
	To allow/deny a paged announcement * 7 2 1 1 Deny * 7 2 1 0 Allow C. Tone	
Message Waiting	Caller	To leave a message waiting indication <i>When the called extension is busy or does not answer</i> MESSAGE C. Tone
	Called extension	To call back MESSAGE
Log-in/Log-out	* 7 3 6 1 For Log-in * 7 3 6 0 For Log-out ICD Group extension no. Specified * All C. Tone	



- Consult your dealer for more details about the feature numbers.
- You can change the flexible CO buttons to feature buttons.
- “Location of Controls” is shown on page 11.

Using the Display Proprietary Telephone

◆◆ Using the Call Log or Directories

You can make a call with the call log or directories as follows:

Outgoing Call Log
Incoming Call Log
Extension Number Directory
System Speed Dialing Directory
Personal Speed Dialing Directory

◆ Calling with a call log or directory

While on-hook



Press **Left** or **Right** until **desired log/directory** appears.

Press **ENTER**.

Press **Up** or **Down** until **desired item** appears.

Off-hook.



• To cancel or exit, press ^{CANCEL} or ^{EXIT} .

◆ Clearing the log information

While confirming the log information



CLEAR



Press **Up** or **Down** until **desired item** appears.

Press **"CLEAR"**.

◆ Storing the caller's information for the Personal Speed Dialing Directory

While confirming the log information



AUTO DIAL



STORE

OR



name



AUTO DIAL



STORE

OR



EXIT



OR

PAUSE



Press **Up** or **Down** until **desired item** appears.

Press **STORE** or **ENTER**.

Enter **name***
(max. 20 characters).

Press **STORE** or **ENTER**.


Press **"EXIT"** or **PAUSE**.



• * To enter characters, refer to "Entering Characters".

Using the Display Proprietary Telephone

◆ Storing names and numbers for the Personal Speed Dialing Directory

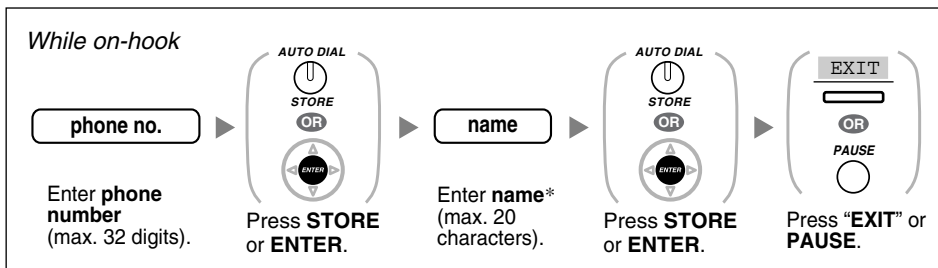

- * To enter characters, refer to "Entering Characters".

◆◆ Accessing the System Features

You can access these features with the "Feature Access" menu:

Automatic Callback Busy Cancel

Group Call Pickup

Directed Call Pickup

Doorphone Call

Door Open

External Background Music

Paging



- For further information, refer to the Business Telephone System User Manual.

Using the Display Proprietary Telephone

◆◆ Entering Characters

You can enter alphabetic characters and digits using the dialing buttons. Pressing a dialing button repeatedly displays different characters, as shown in the following tables. While entering characters, you can move the cursor with the left and right Navigator keys and delete a character with the TRANSFER button.

To toggle between Table 1 and Table 2, press the Soft button (S1) at any time while entering characters.

Table 1 (Standard mode)

Times Buttons	1	2	3	4	5	6	7	8	9
1	!	?	"	1					
2	A	B	C	a	b	c	2		
3	D	E	F	d	e	f	3		
4	G	H	I	g	h	i	4		
5	J	K	L	j	k	l	5		
6	M	N	O	m	n	o	6		
7	P	Q	R	S	p	q	r	s	7
8	T	U	V	t	u	v	8		
9	W	X	Y	Z	w	x	y	z	9
0	(space)	.	,	'	:	;	0		
*	/	+	—	=	<	>	*		
#	\$	%	&	@	(	)	€	£	#

Using the Display Proprietary Telephone

Table 2 (Option mode)*


Times Buttons	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
1	!	?	"	ä	ö	ü	1								
2	A	B	C	a	b	c	À	Á	Â	Ã	Ä	Å	Æ	Ç	2
3	D	E	F	d	e	f	Ð	È	É	Ê	Ë	3			
4	G	H	I	g	h	i	Ì	Í	Î	Ï	4				
5	J	K	L	j	k	l	5								
6	M	N	O	m	n	o	Ñ	Ò	Ó	Ô	Õ	Ö	Ø	Œ	6
7	P	Q	R	S	p	q	r	s	Š	ß	7				
8	T	U	V	t	u	v	Ù	Ú	Û	Ü	8				
9	W	X	Y	Z	w	x	Ý	z	Ý	Ž	9				
0	(space)	.	,	'	:	;	0								
*	/	+	—	=	<	>	*								
#	\$	%	&	@	(	)	€	£	#						

* Some characters may not be displayed depending on the software version of the connected Business Telephone System.

Settings on the Programming Mode

◆◆ Setting Features

You can customize many features of your telephone as shown in the following tables. Original settings are shown in the gray boxes. For later reference, place a check mark in the boxes below to indicate your customized settings.

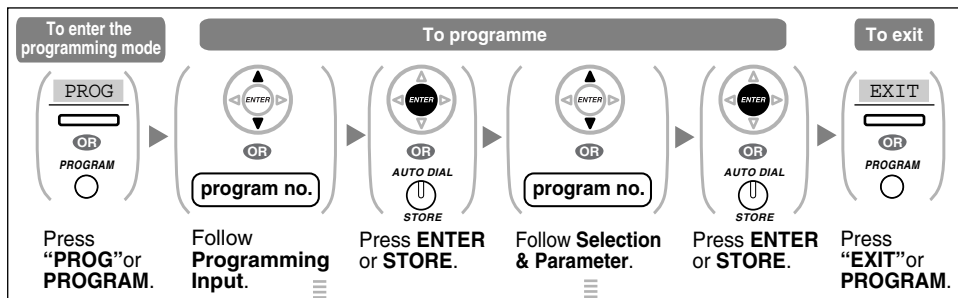

Item	Programming Input	Selection & Parameter	
Would you like to turn on the display backlight of the KX-T7633/KX-T7636? (Display Backlight Selection)	[0] [4] [Back light]	[0]	☐ Yes—ON in use [Automatic]
		[1]	☒ Yes—Always ON [Always On]
		[2]	☐ No—Always OFF [Always Off]
How do you prefer to receive an intercom call? (Alternate Receiving—Ring/Voice)	[2] [1] [Voice Call]	[0]	☐ Ringing [Tone Call]
		[1]	☐ Directly—The party's voice is heard without ringing. [Voice Call]
		[2]	☐ Ring only—Prohibiting the caller switching to the voice mode. [Voice Call Deny]
Do you prefer to receive call waiting for outside calls?	[3] [0] [C.Wait CO]	[0]	☐ No (No tone) [CW Tone Off]
		[1]	☒ Yes (Tone) [CW Tone On]
Which type of call waiting for intercom calls do you prefer? (Call Waiting Selection)	[3] [1] [C.Wait Ext]	[0]	☐ No call [CW Tone Off]
		[1]	☒ Tone [CW Tone On]
		[2]	☐ Voice announcement through the built-in speaker [OHCA (Announce)]
		[3]	☐ Voice announcement through the handset [Whisper OHCA]
Which type of call waiting tone do you prefer? (Call Waiting Tone Type Selection)	[3] [2] [C.Wait Tone]	[0]	☒ Tone 1 [CW Tone 1]
		[1]	☐ Tone 2 [CW Tone 2]

Settings on the Programming Mode


Item	Programming Input	Selection & Parameter	
Would you like to show a message on the caller's telephone display? (Absent Message)	40 [Absent Msg]	0	☐ No-Off [Absent Msg Off]
		message no. (1-8)	☐ Yes-Shows the selected message.
		9	☐ Yes-Shows your personal message.
Where are your incoming calls forwarded or refused? (Call Forwarding [FWD]/Do Not Disturb [DND])	50 OR FWD/DND 📞 (for both calls) [Fwd/DND Both] 51 (for outside calls) [Fwd/DND CO] 52 (for intercom calls) [Fwd/DND Ext]	0	☐ Off [Fwd/DND Off]
		1	☐ Do Not Disturb (DND) [Do Not Disturb]
		2 + desired no. (max. 32 digits)	☐ All-Forward all calls [Fwd All:]
		3 + desired no. (max. 32 digits)	☐ Busy-Forwarded when your extension is busy. [Fwd Busy:]
		4 + desired no. (max. 32 digits)	☐ No Answer-Forwarded when you do not answer. [Fwd N/A:]
		5 + desired no. (max. 32 digits)	☐ Busy/No Answer-Forwarded when your extension is busy. [Fwd B/NA:]
Do you use the headset? (Headset Operation)	61 [Headset Mode]	0	☐ No-Headset off [Headset Mode Off]
		1	☐ Yes-Headset on [Headset Mode On]
Would you like to set your extension PIN or change a stored extension PIN to new one? (Extension PIN [Personal Identification Number])	90 [Extension PIN]	extension PIN (max. 10 digits) + ENTER/STORE + same PIN	To set an extension PIN
		stored extension PIN + new PIN (max. 10 digits) + ENTER/STORE + same PIN	To change a stored extension PIN to new one
Would you like to prevent others from seeing your personal directory and call log? (Directory and Call Log Lock)	92 [Display Lock]	extension PIN (max. 10 digits) + 0	☐ To unlock [Display Lock Off]
		extension PIN (max. 10 digits) + 1	☐ To lock [Display Lock On]



- If nothing is entered for one minute in the programming mode, the telephone returns to normal status.
- To exit the mode at any time, lift the handset.
- For further information on “Settings on the Programming Mode”, refer to the Business Telephone System User Manual.

Location of Controls

◆ KX-T7636

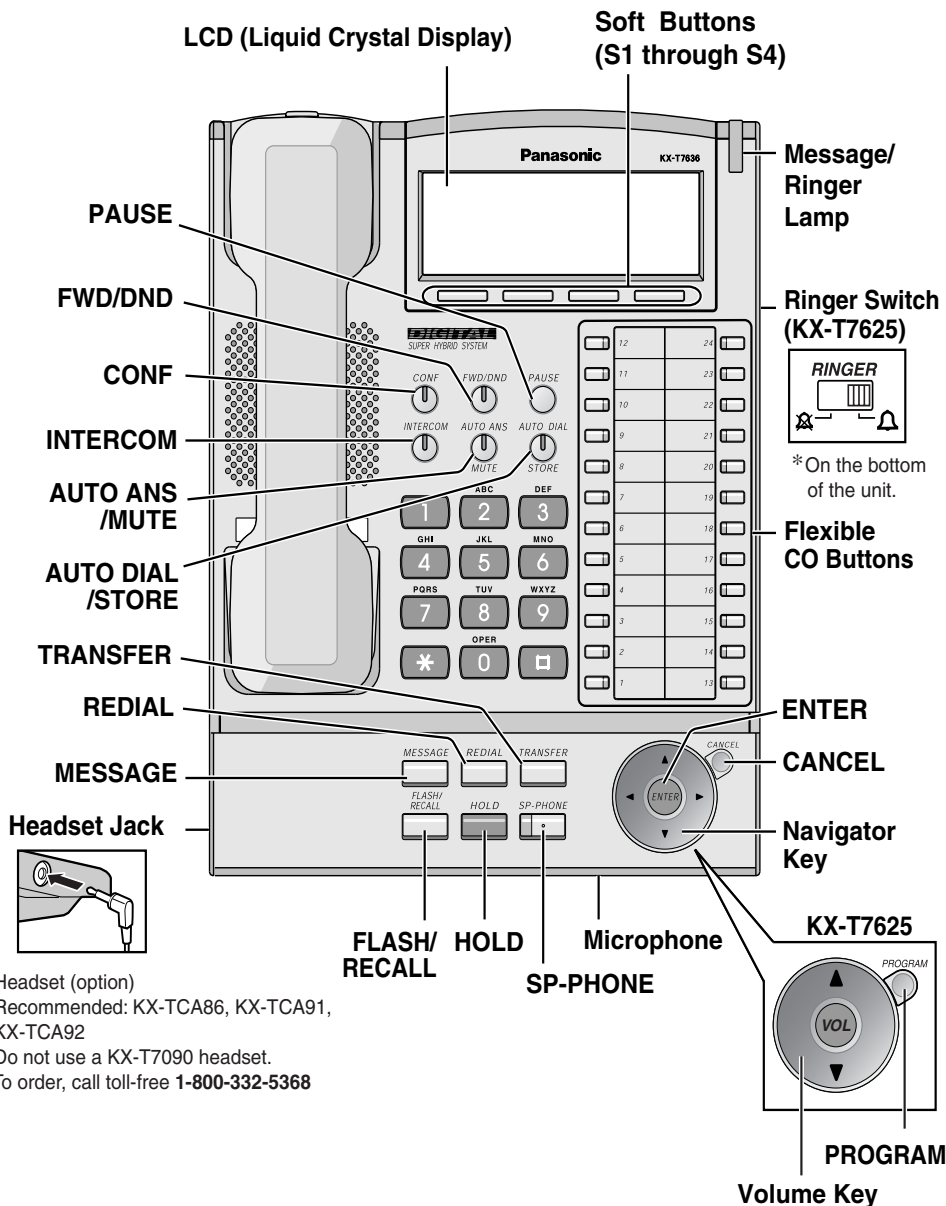

* Headset (option)
Recommended: KX-TCA86, KX-TCA91,
KX-TCA92
Do not use a KX-T7090 headset.
To order, call toll-free 1-800-332-5368

Location of Controls

PAUSE	PAUSE: Used to insert a pause when storing a telephone number. This button also functions as the PROGRAM button when there is no PROGRAM button on your telephone.	HOLD	HOLD: Used to place a call on hold.
FWD/DND	FWD/DND (Call Forwarding/Do Not Disturb): Used to perform Call Forwarding or Do Not Disturb.	SP-PHONE	SP-PHONE (Speakerphone): Used for the hands-free operation.
CONF	CONF (Conference): Used to establish a multiple-party conversation.		Navigator Key (KX-T7630/7633/7636): Used to adjust the volume and the display contrast or select desired items.
INTERCOM	INTERCOM: Used to make or receive intercom calls.		Volume Key (KX-T7625): Used to adjust the volume.
AUTO ANS MUTE	AUTO ANS (Auto Answer)/MUTE: Used to receive an incoming call in hands-free mode or mute the microphone/handset during a conversation.	CANCEL	CANCEL (KX-T7630/7633/7636): Used to cancel the selected item.
AUTO DIAL STORE	AUTO DIAL/STORE: Used for System/Personal Speed Dialing or storing program changes.	PROGRAM	PROGRAM (KX-T7625): Used to enter and exit the personal programming mode.
TRANSFER	TRANSFER: Used to transfer a call to another party.		ENTER (KX-T7630/7633/7636): Used to confirm the selected item.
REDIAL	REDIAL: Used to redial the last dialed number.	CO	CO: Used to make or receive an outside call. Pressing this button seizes an idle outside line automatically. (Button assignment is required.) Also used as feature buttons. (Button assignment is required.)
MESSAGE	MESSAGE: Used to leave a message waiting indication or call back the party who left the message waiting indication.		Message/Ringer Lamp: When you receive an intercom call, the lamp flashes green, and on an outside call, the lamp flashes red. When someone has left you a message, the lamp stays on red.
FLASH/RECALL	FLASH/RECALL: Used to disconnect the current call and make another call without hanging up.		Soft Buttons (KX-T7630/7633/7636): Used to select the item displayed on the bottom line on the display.


The telephone line cord (included)

CAUTION

Ensure the cords are inserted in the grooves to prevent damage to the connector.

→ Connect to a KX-TDA series Business Telephone System (**TO MAIN UNIT / PABX**).

→ Connect to a single line telephone for XDP or parallel connections (**TO TEL**).

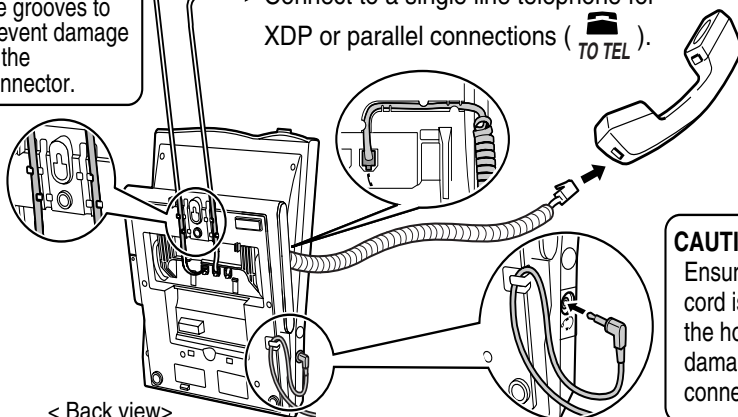

< Back view >


CAUTION

Ensure the handset cord is inserted in the hook to prevent damage to the connector.




- Consult your dealer for more details about XDP.

Setting

Speaker volume	<i>While in hands-free conversation</i>	 / 
Handset/Headset volume*	<i>While using the handset or headset</i>	Press Up or Down .
Ringer volume	KX-T7625 <i>While on-hook or receiving a call</i>  Slide the lever of the Ringer switch to (Off/On).  If On is selected, press Up or Down .	
	KX-T7630/7633/7636 <i>While on-hook or receiving a call</i>  Press Up or Down .	
LCD Contrast	KX-T7630/7633/7636 <i>While on-hook</i> 	
Ring Tone	 Press Twice .	

* If you hear your own voice through the handset or headset, decrease the volume.

Tilt Angle Adjustment

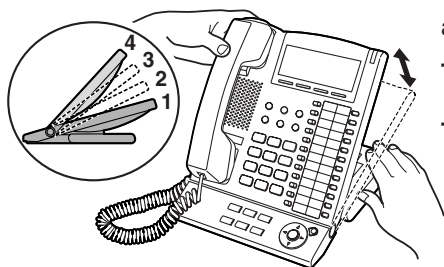

The tilt angle of the operation board can be adjusted to one of four angles.

To lift: Lift up the operation board to the desired step-angle (1 → 2 → 3 → 4).

To set down: Lift up the operation board to the highest angle and then press down to step-angle 1. **Be careful not to get your fingers caught between the base and the operation board.**




- Pull down the handset hook until it locks to prevent the handset from slipping down from the operation board when at step-angle 4.




Wall Mounting


- 1 Set the operation board to step-angle 1.

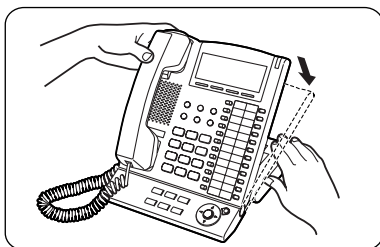


- 2 Connect the telephone line cord, and then attach ① first and then ② of the wall mounting adaptor.

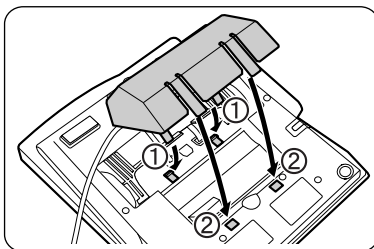

- 3 Mount the unit on the wall.

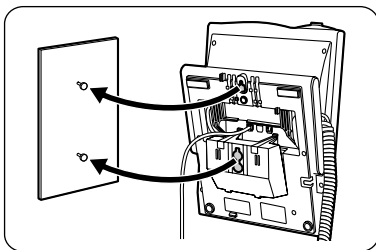

- 4 Pull down the handset hook until it locks, so the tab holds the handset.
To temporarily place the handset down during a conversation, hook it over the top edge of the phone as shown.

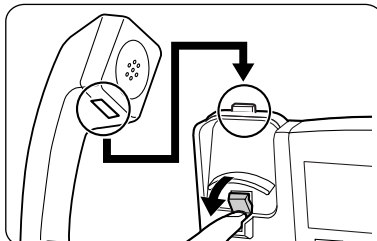

*Model shown is KX-T7636.


Installing the KX-T7601/KX-T7603

To prevent damage to the telephone, be sure to unplug the extension line before you set up or remove the USB Module or the Add-on Key Module.


◆◆ KX-T7601 (For KX-T7633/7636) includes USB cable

The USB Module can be connected between the digital proprietary telephone and the personal computer through USB interface to implement personal CTI (Computer Telephony Integration).


- 1 Remove the connector cover using a screwdriver.

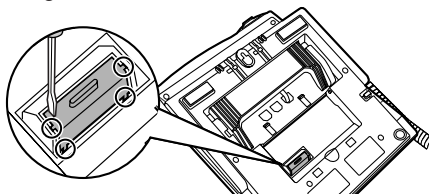


- 2 Insert the flat cable into the connector.



- 3 Couple both hinges and slide in the unit.




- 4 Push down the cover until it locks, and connect the USB cable to USB port.

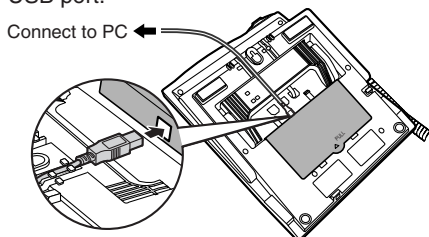

* Please use a USB cable shorter than 3 m (3.28 yards).


◆◆ KX-T7603 (For KX-T7633/7636)

The Add-on Key Module has 12 CO buttons. These buttons are used to seize an outside line, make a call using One-touch Dialing, or access certain features.




<with a KX-T7636>


- 1 Open the cover.




- 2 Attach the KX-T7603 to your telephone with screws.



- 3 Insert the flat cable into the connector.

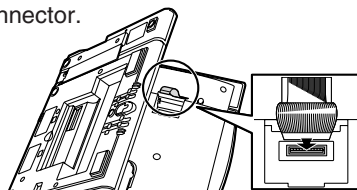

- 4 Close the cover.



For your future reference

SERIAL NO. _____
(found on the bottom of the unit)

DATE OF PURCHASE _____

NAME OF DEALER _____

DEALER'S ADDRESS _____

DEALER'S TEL. NO. _____

Copyright:

This manual is copyrighted by Panasonic Communications Co., Ltd. (PCC). Under the applicable copyright laws, this manual may not be reproduced in any form, in whole or part, without the prior written consent of PCC and its licensee.

© 2003 Panasonic Communications Co., Ltd. All Rights Reserved.

Panasonic Consumer Electronics Company

Division of Matsushita Electric Corporation of America

One Panasonic Way
Secaucus, NJ 07094

Panasonic Sales Company

Division of Matsushita Electric of Puerto Rico, Inc.

Ave. 65 de Infantería, Km. 9.5
San Gabriel Industrial Park
Carolina, Puerto Rico 00985

<http://www.panasonic.com/csd>